



## Chapter 5



# Accessories Part-1

## Underground Cable Laying





# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Cable roller (standard)

galvanized running in dust and water proof bearings.

Load: 250 kg  
max. Cable-Ø 155 mm  
Weight: 4,2 kg  
Order No. 009.402.00



## Cable roller (wide)

galvanized running in dust and water proof bearings

Load: 250 kg  
max. Cable-Ø 200 mm 280 mm  
Weight: 5,0 kg 6,8 kg  
Order No. 009.402.55 009.402.60



## Cable roller with ground plate (standard)

galvanized

Load: 250 kg  
max. Cable-Ø 155 mm  
Weight: 4,5 kg  
Order No. 009.403.00

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## Cable roller

made of PVC.

Load: 250 kg  
max. Cable-Ø 155 mm  
Weight: 3,6 kg  
Order No. 009.402.10



## Spare roller

for (standard) cable laying and angle roller with bearings and axle, galvanized.

Weight: 1,7 kg  
Order No. 009.401.01



## Tube roller with base plate

galvanized, for welding of single lengths and inserting inliners of 300 mm diameter.

Load: 300 kg  
Weight: 4,0 kg  
Order No. 009.100.00



Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Corner roller with plug-in hinges (standard)

galvanized, running in dust and water proof bearings.

Load per roller:	250 kg
max. Cable-Ø	110 mm
Weight:	13,5 kg
Order No.	009.404.00



## Accessory: Earth nails, galvanized (w. ill.)

Weight:	1,4 kg
Order No.	009.405.00



## Corner roller with plug-in hinges (wide)

galvanized, running in dust and water proof bearings.

Load per roller:	250 kg	250 kg
max. Cable-Ø	160 mm	240 mm
Weight:	13,6 kg	16,0 kg
Order No.	009.404.20	009.404.50



## Accessory: Earth nails, galvanized (w. ill.)

Gewicht:	1,4 kg
Bestell-Nr.	009.405.00

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## Heavy-duty roller

galvanized, running in dust and water proof bearings.


Load: 350 kg  
max. Cable-Ø 200 mm  
Weight: 17,0 kg  
**Order No. 009.408.20**



## Heavy-duty corner roller

galvanized, running in dust and water proof bearings.

Load: 800 kg  
max. Cable-Ø 170 mm  
Weight: 25,0 kg  
**Order No. 009.408.50**

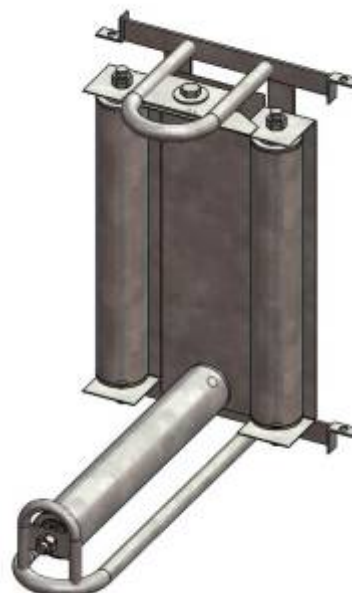

Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories

## Cable guide and run-off frame galvanized.


This device is placed just behind the cable drum.

Load: 200 kg  
Weight: 15 kg  
**Order No. 009.409.00**

## Reinforced version

for laying of heavy cable and tube diam.  
> 300 mm

Load: 500 kg  
Weight: 20 kg  
**Order No. 009.409.10**

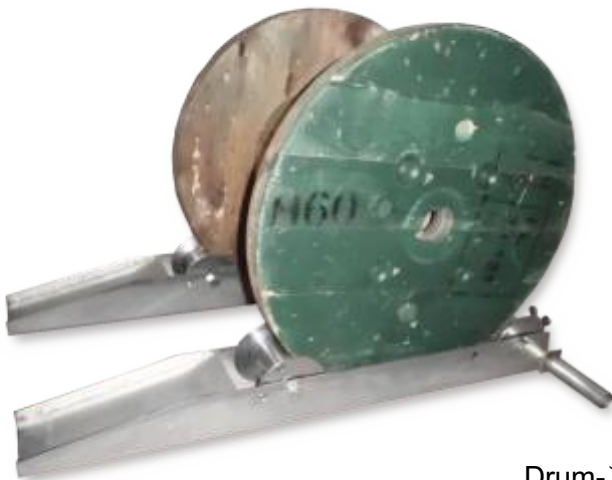

## Reeling rails with fixing bar

Distance between rails is adjustable to different cable drum widths. Securing of the drum by locking of rollers.

Drum- (mm)	Load (kg)	Max. Drum Width (mm)	Weight/Pair (kg)	Order No.
350 - 1000	1000	800	31	<b>009.676.00</b>
500 - 1400	1500	900	33	<b>009.676.10</b>
500 - 1800	2000	1100	53	<b>009.676.20</b>
500 - 2800	2000	1650	86	<b>009.676.40</b>

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001



## Hydraulic lifting jacks for cable drums

galvanized with plug-in cable drum claws, mobile version

Fig.: Hydr. lifting jacks and steel shaft with sliding bearings and fixing clamps.

Drum-~	Load / pair	Weight	Order-No.
900-2200 mm	6 t	50 kg	<b>009.413.00</b>
900-3200 mm	10 t	96 kg	<b>009.414.00</b>
900-3200 mm	20 t	102 kg	<b>009.415.00</b>



## Mechanical lifting jacks

mobile version with turnable head and adjustable drum claw, safety crank and folding handle.

Drum-~	Load / pair	Weight	Order-No.
700-2600 mm	6 t	64 kg	<b>009.661.00</b>
700-3000 mm	10 t	70 kg	<b>009.662.00</b>
700-3000 mm	20 t	88 kg	<b>009.663.00</b>



## Steel shaft for cable drums

with lathed bearing point

H = hollow shaft, V = solid shaft (for hydraulic lifting jacks only)

Dimensions		Weight	Order No.
Ø 50 x 1500 mm	V	23.1 kg	<b>009.420.00</b>
Ø 60 x 1500 mm	V	33.3 kg	<b>009.421.00</b>
Ø 76 x 1800 mm	H	50.0 kg	<b>009.423.00</b>
Ø 76 x 2000 mm	H	58.0 kg	<b>009.424.00</b>
Ø 76 x 2200 mm	H	66.0 kg	<b>009.425.00</b>
Ø 89 x 2200 mm	H	82.0 kg	<b>009.426.00</b>
Ø 102 x 2200 mm	H	141.1 kg	<b>009.427.00</b>
Ø 102 x 2500 mm	H	160.3 kg	<b>009.428.00</b>



Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Steel shaft for cable drums

with sliding bearings and lathed bearing points

H= hollow shaft, V= solid shaft (for hydraulic lifting jacks only)

Dimensions		Weight	Order No.
Ø 50 x 1500 mm	V	23.1 kg	<b>009.420.01</b>
Ø 60 x 1500 mm	V	33.3 kg	<b>009.421.01</b>
Ø 76 x 1800 mm	H	50.0 kg	<b>009.423.01</b>
Ø 76 x 2000 mm	H	58.0 kg	<b>009.424.01</b>
Ø 76 x 2200 mm	H	66.0 kg	<b>009.425.01</b>
Ø 89 x 2200 mm	H	82.0 kg	<b>009.426.01</b>
Ø 102 x 2200 mm	H	141.1 kg	<b>009.427.01</b>



## Aluminium shaft for cable drums

with lathed bearing points

H = hollow shaft, V = solid shaft (for hydraulic lifting jacks only)

Dimensions		Weight	Order-No.
Ø 60 x 1500 mm	V	11.9 kg	<b>009.421.20</b>
Ø 60 x 1800 mm	V	14.3 kg	<b>009.421.22</b>
Ø 75 x 1800 mm	H	22.3 kg	<b>009.423.20</b>
Ø 75 x 2000 mm	H	24.8 kg	<b>009.424.20</b>
Ø 75 x 2200 mm	H	27.3 kg	<b>009.425.20</b>
Ø 90 x 1800 mm	H	32.1 kg	<b>009.426.20</b>
Ø 90 x 2000 mm	H	35.7 kg	<b>009.426.30</b>
Ø 90 x 2200 mm	H	39.2 kg	<b>009.426.40</b>



## Aluminium shaft for cable drums

with sliding bearings and with lathed bearing points

H = hollow shaft, V = solid shaft (for hydraulic lifting jacks only)

Dimensions		Weight	Order-No.
Ø 60 x 1500 mm	V	16.0 kg	<b>009.421.21</b>
Ø 60 x 1800 mm	V	18.7 kg	<b>009.421.23</b>
Ø 75 x 1800 mm	H	25.8 kg	<b>009.423.22</b>
Ø 75 x 2000 mm	H	28.3 kg	<b>009.424.21</b>
Ø 75 x 2200 mm	H	30.8 kg	<b>009.425.21</b>
Ø 90 x 1800 mm	H	34.5 kg	<b>009.426.21</b>
Ø 90 x 2000 mm	H	38.1 kg	<b>009.426.31</b>
Ø 90 x 2200 mm	H	41.7 kg	<b>009.426.41</b>

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001



## Hydraulic lifting jacks

galvanized with centralized drum axle claws

Drum-Ø: 3500 - 5000 mm  
Load/pair: 60 t  
Weight: 300 Kg  
**Order-No. 029.700.00**

Dimensions, LxWxH: 1980 mm x 935 mm x 2676 mm



## Steel shaft for 029.700.00

with lathed bearing point

Dimensions mm	Weight kg		Order-No.
Ø 114 x 3300	230	sliding bearing	<b>029.059.11</b>
Ø 127 x 2500	206		<b>009.429.00</b>
Ø 127 x 3200	200		<b>029.016.10</b>
Ø 127 x 3300	210		<b>029.080.00</b>
Ø 133 x 2980	276	sliding bearing	<b>029.016.00</b>
Ø 140 x 3350	318	sliding bearing	<b>029.015.00</b>
Ø 140 x 3610	332	sliding bearing	<b>029.015.20</b>
Ø 140 x 3810	375	sliding bearing	<b>029.015.21</b>
Ø 194 x 4150	410	sliding bearing	<b>029.016.01</b>



Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



**Hydraulic lifting jack, height adjustable**  
galvanized, to transport by forklift

Drum-Ø: 2300 - 3900 mm  
Load: 2700 kg  
Weight: 390 kg  
**Order-No. 029.600.01**

Dimensions, LxWxH:  
2500 mm x 1950 mm x 2032 mm



**Hydraulic lifting jack, height adjustable**  
galvanized.

Drum-Ø: 2600 - 3900 mm  
Load: 2700 kg  
Weight: 236 kg  
**Order-No. 029.600.00**

Dimensions, LxWxH: 2500 mm x 1950 mm x 2032 mm

*Drum brake, steel shaft and centering cones are not included.*

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## Steel shaft for 029.600.00 and 009.600.01 with lathed bearing point.

Dimensions mm	Weight kg		Order-No.
Ø 60 x 2000	28		008.042.02
Ø 70 x 2000	29		008.042.00
Ø 70 x 2039	37	sliding bearing	029.002.00
Ø 75 x 2039	25	sliding bearing, Alu	029.002.20
Ø 76 x 2000	43		029.048.00



## Mechanical drum brake

galvanized, steel shaft with plain bearings and centering cones.

Order-No. 008.480.01



Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches


Asphalt Recycler

Accessories



## Centering cones galvanized

Shaft-Ø	Bore-Ø	Weight	Order No.
75 mm	95-140 mm	6 kg	<b>009.683.00</b>
90 mm	120-170 mm	9 kg	<b>009.684.00</b>

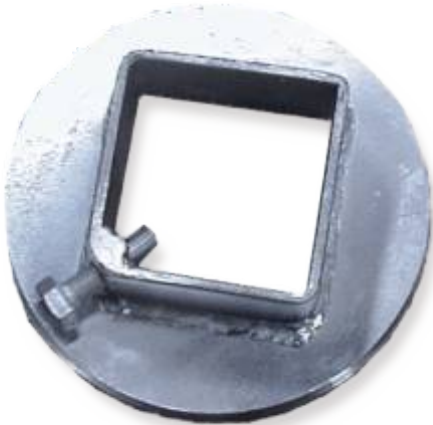

## Fixing clamps for steel shafts galvanized

Dimensions	Weight	Order-No.
Ø 45 – 51 mm	1.5 kg	<b>009.435.00</b>
Ø 50 – 60 mm	1.6 kg	<b>009.436.00</b>
Ø 65 – 76 mm	2.0 kg	<b>009.437.00</b>
Ø 80 – 95 mm	2.1 kg	<b>009.438.00</b>
Ø 100 – 115 mm	2.3 kg	<b>009.439.00</b>
Ø 117 – 127 mm	5.0 kg	<b>009.439.50</b>



## Fixing clamps for aluminium shafts galvanized

Dimensions	Weight	Order-No.
Ø 45 mm	1.5 kg	<b>009.430.00</b>
Ø 60 mm	1.6 kg	<b>009.431.01</b>
Ø 75 mm	3.6 kg	<b>009.432.00</b>
Ø 90 mm	4.5 kg	<b>009.433.00</b>
Ø 105 mm	5.0 kg	<b>009.434.00</b>

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## Length measuring device with spoked wheel

precision measurement with zero-reset

Measuring range: 9999,99 m

Weight: 3,2 kg

Order-No. 009.119.00

## Transport bag (without Illustr.)

Order-No. 009.119.10

## Length measuring device

precision measurement with zero-reset

Measuring range: 9999,99 m

Weight: 5,5 kg

Order-No. 009.120.00

## Accessory for rail measurement (without Illustr.)

Order-No. 009.120.10

## Double-wheeled length measuring device

(without Illustr.) with zero-reset

Measuring range: 9999,99 m

Weight: 1,8 kg

Order-No. 009.121.00



Specifications are subject to change without notice. Output details are depending on use conditions.





# Underground Cable Laying Accessories

## Cable Rewinding Unit KSP 80 / 80t

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



The KSP 80 pulls cable rests from a submarine cable ship and rewinds it directly on cable drums of up to 80,000 kg total weight. The drums get tensed up by the drive rollers. A tensile and braking force of up to 110 kN depending on the drum diameter.

The winding and rewinding speed is regulated steplessly between 0 up to 25 m/min. What means that cables can be rewinded even in steep trails.

### Application fields:

- Laying of submarine cables
- Connection of wind parks
- Cable laying in steep trails



Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001



# Underground Cable Laying Accessories

## Cable Rewinding Unit KSP 80 / 80t



Cable Laying Machines

Pipe Renewal Winches

Asphalt Recycler

Accessories

### Layered Arrangement:

A remote control with potentiometer controls the drive rollers and the layered arrangement.

### Control of the Cable Rewinding Unit:

The remote control regulates speed and direction of the drum and the layered arrangement. Therefore the operator is out of the danger zone and at the same time flexible to supervise the rewinding.

### External Hydraulic Aggregate BHA 22060:

For powering the cable rewinding unit an external hydraulic aggregate is to be used.

The BHA 22060 is sound insulated and to be positioned in sufficient distance.

Design flow rate: 60 l/min  
Design pressure: 220 bar  
Max. pressure: 250 bar

### Hydraulic Control:

The gauges indicate the locking and drum drive pressure. They inform permanently about the current pressures and how much reserves are remaining. Especially for the winding these information are crucial.



Type	Load kg	Weight kg	Drum -Ø mm	Max.Drum Width mm	Length mm	Width mm	Height mm	Order-No.
<b>KSP 80</b>	80000	8600	2500 - 5000	6000	9000	3572	2000	<b>029.400.00</b>
<b>Layered A.</b>	-	2000			9524	2124	3000	<b>029.430.00</b>
<b>BHA 22060</b>	-	990			1520	920	1620	<b>010.170.00</b>

Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Cable and wire measuring device:

Measuring range		Weight	Order-No.
Ø Cable	Ø Wire		
3 - 21 mm	-	1.3 kg	<b>009.122.00</b>
3 - 50 mm	-	1.8 kg	<b>009.122.10</b>
3 - 21 mm	3 - 12 mm	1.3 kg	<b>009.123.00</b>
3 - 50 mm	3 - 22 mm	1.8 kg	<b>009.123.10</b>



## Protection roller for installed cable galvanized.

Weight: 10 kg  
Adjustable from: 380 - 750 mm  
**Order-No. 009.407.00**



## Protection roller for installed cable, double version galvanized.

Weight: 12 kg  
Adjustable from: 380 - 750 mm  
**Order-No. 009.408.00**



## Manhole tension roller

suitable for any cable tube manhole.

Weight: 16 kg  
Adjustable from: 1020 - 1650 mm  
**Order-No. 009.406.00**

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## Cable inserting device

galvanized

Tube-Ø inside	Weight	Order-No.
Ø 50 mm	1.0 kg	<b>009.519.00</b>
Ø 80 mm	1.5 kg	<b>009.520.00</b>
Ø 100 mm	2.5 kg	<b>009.521.00</b>
Ø 120 mm	3.0 kg	<b>009.522.00</b>
Ø 150 mm	4.0 kg	<b>009.523.00</b>



## Cable inserting device, divided, with protection rollers, galvanized

Tube-Ø inside	Weight	Order-No.
Ø 100 mm	6.5 kg	<b>009.528.00</b>
Ø 120 mm	6.8 kg	<b>009.529.00</b>
Ø 150 mm	9.9 kg	<b>009.530.00</b>



## Cable guiding roller

galvanized, max. Cable-Ø 230mm

**Order No. 009.589.00**

## Basis for Cable guiding roller

galvanized (without illustration)

**Order No. 009.589.07**



Braces	Span range	Order-No.
	1200 – 2000 mm	<b>133.600.00</b>
	1460 – 2500 mm	<b>133.601.00</b>
	2300 – 4100 mm	<b>133.602.00</b>



Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Collapsible Shelter - Gable Form

for welding of PE-pipes or cable connecting

Material: PVC coated  
Spec. properties: fire resistant  
Colour: white/yellow

Length	Width	Height	Weight	Order No.
1800mm	1800mm	1700mm	9.5 kg	<b>009.665.92</b>
2500mm	2000mm	1900mm	13.7 kg	<b>009.665.94</b>

- Mounted within 1 minute by 1 person, no waste of time!
- Fibreglass construction is fixed on the coat. No loss or mix of single rods possible!
- Transport bag is included



## Vertical-sited tent

For working on service cabinets and protection for external operating stands in pipe laying business.

Material: PVC coated  
Spec. properties: fire resistant  
Colour: white/yellow

Length	Width	Height	Weight	Order No.
1800mm	1800mm	2000mm	13.9 kg	<b>009.665.98</b>
2500mm	2500mm	2000mm	18.7 kg	<b>009.665.99</b>

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## Wireman's tent

Material: PVC-coated material, non-rotting canvas and fire resistant, with tent frame,  
Colour: PVC = white, canvas = stone-grey / olive

Length x Width x Height mm	Weight	Order-No.
2000 x 2000 x 2000	24 kg	<b>009.665.00</b>
2500 x 2500 x 1900	27 kg	<b>009.665.10</b>
3000 x 2500 x 1900	30 kg	<b>009.665.20</b>

Other sizes on request



## Welding and jointing screen

Material: canvas, water-repellent, anti-fouling, fire resistant.  
Colour: olive-black

Diameter	Weight	Order-No.
2000 mm	3.5 kg	<b>009.666.00</b>
2500 mm	9.5 kg	<b>009.667.00</b>



## Cable bundling trestle

galvanized, for simultaneous laying of three single electric cables

**Design with wooden panel:**  
**Order-No. 009.496.00**

**Design with rollers on both sides:**  
**Order-No. 009.496.50**

Length	Width	Height	Weight
1140mm	650mm	1270mm	50 kg



Specifications are subject to change without notice. Output details are depending on use conditions.





# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Cable line warning strip, made of PVC

non-aging, temperature resistant, colour-fast, wiping resistant

Strip width: 40 mm (other widths on request)  
Strip length: 250 m/roll  
Weight: 0.9 kg  
Standard colour: yellow  
Print: e.g.: "Attention Telephone Cable"  
"Attention Gas Pipe"


**Order-No. 009.670.00**

Other colours upon request: blue, red, green  
Other prints on request



## Uncoiling device for cable line warning strips for strip width 40 mm

Weight: 0.7 kg  
**Order-No. 009.668.00**

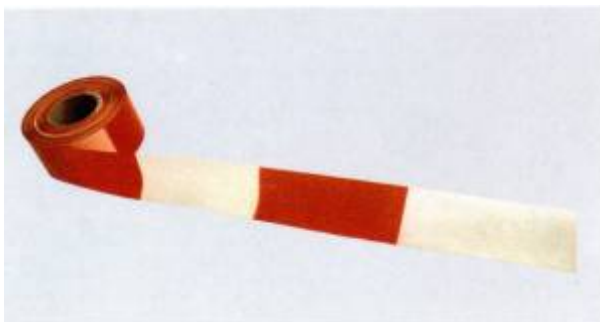

## Barricading strip, made of PVC

with red-white section lines, extremely resistant

Strip width: 80 mm  
Strip length: 500 m/roll  
Weight: 1.3 kg  
**Order-No. 009.669.00**

Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001



## Cable cutter- ratchet type

Max. Cable-Ø	Weight	Order-No.
32 mm	0.6 kg	<b>009.680.00</b>
52 mm	0.8 kg	<b>009.681.00</b>



## Cable shears, ratched-type

For cutting PVC-, leaden or rubber sheathed cable with AL- and CU-conductors

Max. Cable-Ø	100 mm
Weight:	5.5 kg
Order-No.	<b>009.682.00</b>




## Hand cable shears

Max. Cable-Ø	15 mm
Weight:	0.55 kg
	<b>009.126.00</b>



## Hand cable shears

Max. Cable-Ø	26 mm
Weight:	1.8 kg
	<b>009.127.00</b>

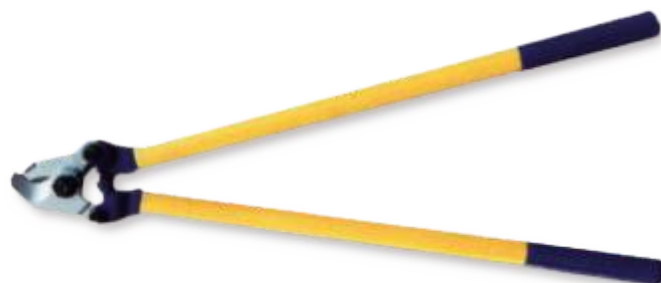

Specifications are subject to change without notice. Output details are depending on use conditions.



# Underground Cable Laying Accessories

Cable Laying Machinery

Pipe Renewal Winches

Asphalt Recycler

Accessories



## Hand cable shears

Max. cable dia.: 38 mm  
Weight: 4.2 kg  
**Order-No. 009.128.00**



## Tube cutter

Max. Tube-Ø	Weight	Order-No.
25mm	0.3 kg	<b>009.685.00</b>
42mm	0.4 kg	<b>009.686.00</b>
60mm	1.1 kg	<b>009.687.00</b>



## Hydraulic hand cable shears

Max. cable dia.: 85 mm  
Weight: 7.3 kg  
**Order-No. 009.130.00**



## Hydraulic cable shears with foot-pump

Max. cable dia.: 120 mm  
Weight: 22.6 kg  
**Order-No. 009.132.00**

also deliverable with safety cage


Specifications are subject to change without notice. Output details are depending on use conditions.



## Bagela

Certified according to DIN EN ISO 9001

## 1.) DEVICES FOR UNDERGROUND CABLE LAYING

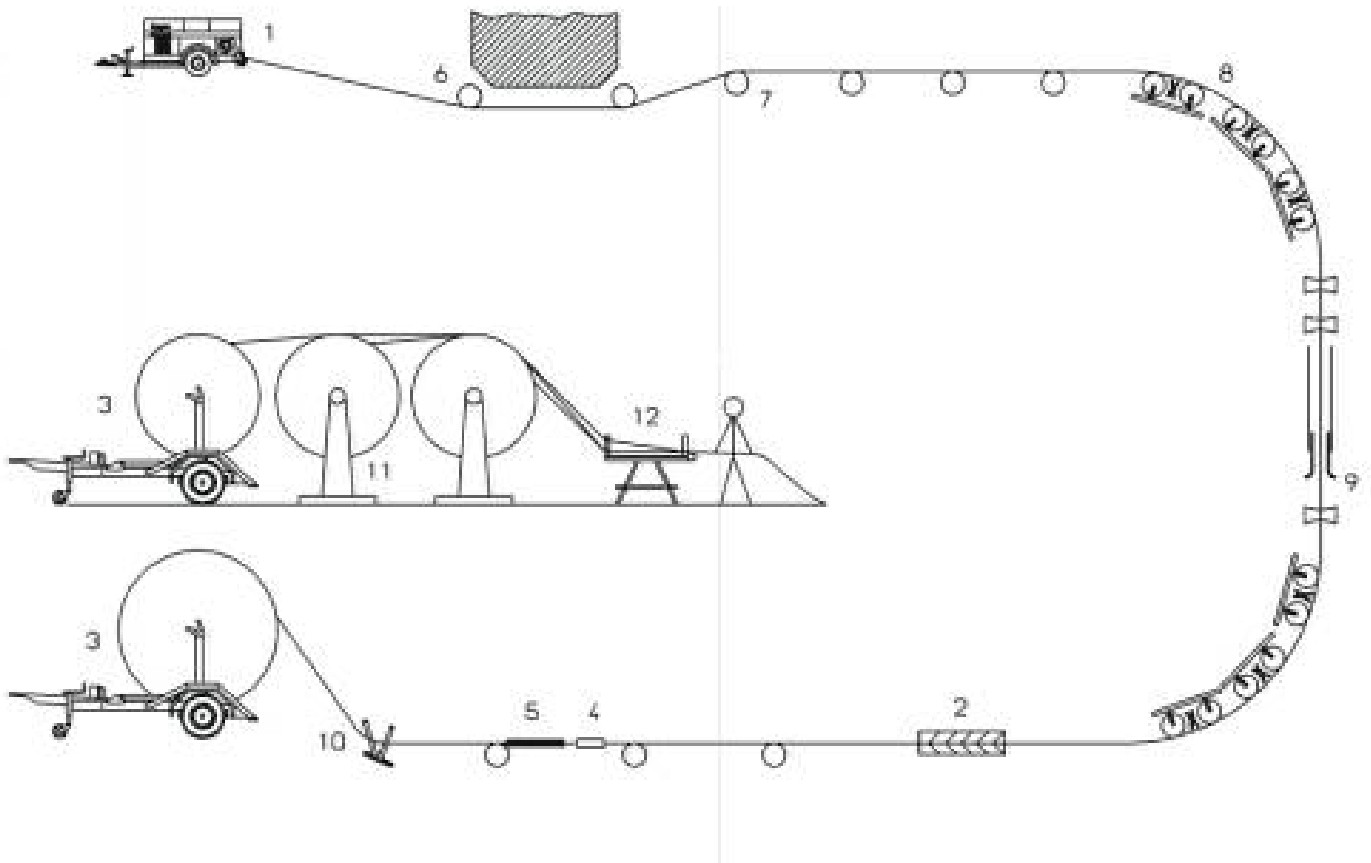

- 1= Cable pulling winch
- 2= Cable pusher
- 3= Cable drum trailer
- 4= Anti-twist device
- 5= Cable Pulling Grip
- 6= Protection roller

- 7= Cable rollers
- 8= Corner rollers
- 9= Inserting device
- 10= Guide and run-off frame
- 11= Drum trestle
- 12= Bundling trestle

Specifications are subject to change without notice. Output details are depending on use conditions.



